


KLECEM L

KLEIN 

ABRASIVOS
MATERIAL HANDLING

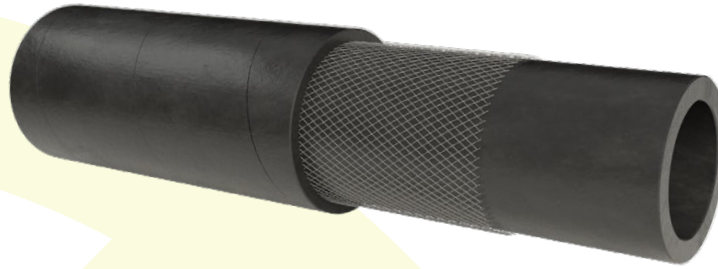

Aplicación y Propiedades

Tubo construido sobre mandril para la impulsión de cemento en polvo, hormigón y materiales granulados a baja presión. Versión ligera.

Composición

Tubo interior: Caucho natural de notable espesor y máxima resistencia a la abrasión, confeccionado con mezclas especiales que aseguran la conducción de la electricidad estática generada por la fricción.

Refuerzo: Hilo sintético de alta tenacidad.

Cubierta exterior: Caucho sintético negro resistente a la abrasión. Impresión tela fina.

Longitudes de fabricación: 40 m hasta diámetro 102 mm.

Gama de temperatura: De -20° a 70° C.

Application and Properties

Mandrel built hose designed for low pressure discharge of dry cement, barytes, concrete and granulated materials. Light duty version.

Construction

Tube: Excellent abrasion resistance thick natural rubber. Made with static conductive compounds that dissipate static electricity.

Reinforcement: High strength synthetic textile yarn.

Cover: Abrasion resistant black synthetic rubber. Wrapped finish.

Standard lengths: 40 m coils for diameters up to 102 mm.

Temperature range: From -20° to 70° C.

 Diámetro Interior Internal Diameter		 Diámetro Exterior External Diameter		 Presión de Trabajo Working Pressure		 Presión de Rotura Bursting Pressure		 Peso Weight
mm	"	mm	"	bar	psi	bar	psi	kg/m
70	2 3/4	82	3 1/4	6	90	18	270	1,75
75	3	87	3 7/16	6	90	18	270	2,01
80	3 1/8	92	3 5/8	6	90	18	270	2,17
90	3 9/16	102	4	6	90	18	270	2,42
100	4	112	4 3/8	6	90	18	270	2,68